


## MultiCo MY-MC100A2/B2 20km V2

**Front**



**Back**

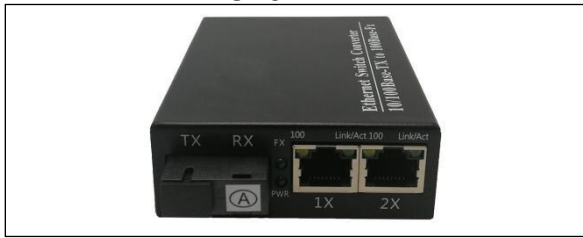

<b>Model</b>	<b>MC-MY100A2/B2 20km</b>
<b>Product</b>	<b>Fast Ethernet2+1 Switch</b>
Fixed Port	2*10/100Base--TX RJ45 port (Data) 1*100M Optical Fiber Port (optional 1310/1550)
Network Protocol	IEEE802.3 IEEE802.3i 10BASE-T IEEE802.3u100BASE-TX IEEE802.3x
Port Specification	10/100BaseT (X) Auto
Transmission Mode	Store and Forward(full wirespeed)
Bandwidth	155Mbps
Packet Forwarding	7.2Mpps
MAC Address	2K
Buffer	2.5M
Transmission Distance	10BASE-T : Cat3,4,5 UTP(≤250 meter) 100BASE-TX : Cat5 or later UTP(150 meter) Single mode single fiber(MAX 20KM) Single mode double fiber (MAX 20KM) Multiple mode double fiber(MAX 850M/2KM) Optional 3-100KM Optical Fiber Module
Watt	≤5W;
LED Indicator	PWR:Power LED FX:(Optical fiber LED) Port:(Orange= Fast Ethernet LED+Green=Link LED)
Power	External power DC 5V 1A
Operating Temperature/Humidity	-15~+65°C; 5%~90% RH Non coagulation
Storage Temperature/Humidity	-40~+75°C; 5%~95% RH Non coagulation
Product size/Packing size (L*W*H)	94mm*70mm*25mm 230mm*125mm*55mm
N.W/G.W (kg)	0.18kg/0.36kg
Installation	Desktop (optional wall hanger+machine hanger parts)
Lightning Protection level	3KV 8/20us; IP30
Certificate	CE mark, commercial; CE/LVD EN60950; FCC Part 15 Class B; RoHS; CNAS; MA
Warranty	Whole device for 2 year