EW-K1302DPC4K/EW-K1302DPUC4K/EW-K1302HDC4K 2-port Cable KVM Switch with Multiple Video Interfaces Type-C/Type-C, Type-C/DP1.2, Type-C/HDMI 2.0

Quick Switch! Button & Switching Software for Easy Switching!!

The MultiCo 2-port Cable KVM Switch offers 3 kinds of video interface at PC port 1/port 2 respectively — Type-C/Type-C, Type-C/DP1.2 and Type-C/HDMI 2.0. The 2-port cable KVM with 2 sets of fixed KVM cables at two PC ports and each fixed cables include Video/Audio/Mic combo cable so that you no longer have cable troubles. The console port offers For instant switching action, it has got a wired Quick Switch! Button -- just a mere flip on the button and it switches to the other computer.



The two USB 2.0 keyboard and mouse ports are actually transparent USB hub ports that feature full driver support for advanced keyboard/mouse. In addition, they can also be connected to other high-speed USB







EW-K1302DPC4K


EW-K1302DPUC4K

EW-K1302HDC4K

Features

- * 1 x wired QuickSwitch! Button for instant switching by a flip
- * 2 fixed 1.2m KVM cable -- Video/Audio/Mic combo cable(Video interface could be Type-C/ Type-C, Type-C/DP1.2 and Type-C/HDMI 2.0)
 PC port Video interface: Type-C/Type-C, Type-C/DP1.2, Type-C/HDMI 2.0,
 Console port video Interface: Display port (EW-K1302DPC4K, EW-K1302DPUC4K), HDMI port (EW-K1302HDC4K),
 - Console port KM interface: USB
- * Supports display resolution up to 3840 x 2160 /4K @60Hz
- Video Interface DP1.2, HDMI2.0 compliant
- * USB 2.0 hub ports for keyboard, mouse or other high-speed USB devices
- * Independent/simultaneous switching of PC and Audio channel
- User-definable hotkeys and universal hotkey for computer switching

Connection Diagram

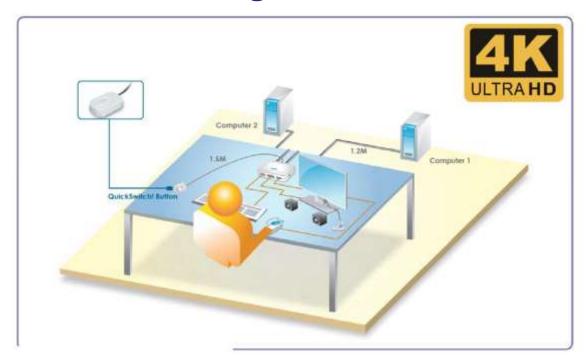

Specifications

	EW-K1302DPUC4K	EW-K1302HDC4K
	2	
	1	
Fixed 2 x 1.2m Type-C /audio/Mic KVM Combo Cable	Fixed 1 x 1.2m DP/USB/Audio/Mic KVM & 1 x 1.2m Type-C Audio/Mic KVM Combo Cable	Fixed 1 x 1.2m HDMI/USB/Audio/Mic KVM & 1 x 1.2m Type-C Audio/Mic KVM Combo Cable
2 x USB 2.0 Type A (Keyboard & Mouse / High-speed USB devices)		
1 x DP1.2	1 x DP1.2	1 x HDMI2.0
1 x 3.5mm audio jack		
	1 x 3.5mm mic jack	
1 x 1.5M wired QuickSwitch Button for instant switching		
QuickSwitch button/Hotkeys/Switching Software		
2 x Orange		
3840 x 2160 4K @60Hz		
USB/Type-C bus-powered		
97 x 83 x 25mm		
Plastic		
FCC, CE		
	/audio/Mic KVM Combo Cable 2 x USB 2.0 Type A 1 x DP1.2	Fixed 2 x 1.2m Type-C /audio/Mic KVM Combo Cable 2 x USB 2.0 Type A (Keyboard & Mouse / High-s 1 x DP1.2 1 x 3.5mm audio jack 1 x 1.5M wired QuickSwitch Button for inst QuickSwitch button/Hotkeys/Switching Sc 2 x Orange 3840 x 2160 4K @60Hz USB/Type-C bus-powere 97 x 83 x 25mm Plastic